

Software Manual

- Star Bluetooth Utility -

Supported Models

- ***TSP650II Series***
(Bluetooth Interface Model)
- ***DK-AirCash***
(SAC10 EBi Model)

Introduction

- This utility enables you to configure your Star Micronics POS device's Bluetooth PIN Number, Device Name, and Security Level
- This manual is made for the Star Bluetooth Utility Ver.1.3.
- The Bluetooth Utility supports the following Windows OS versions:
 - ✓ Windows XP (Service Pack 3 and later)
 - ✓ Windows Vista 32-bit and 64-bit
 - ✓ Windows 7 32-bit and 64-bit
 - ✓ Windows 8 32-bit and 64-bit (except Windows RT)
 - ✓ Windows 8.1 32-bit and 64-bit (except Windows RT 8.1)
- * **Limitation for Windows 8 / 8.1**
 - **Modern UI do not support.**
- When using Windows Vista, Windows 7 or Windows 8 :
Administrator privilege is required to execute this utility.

Notice

- All rights reserved. Reproduction of any part of this manual in any form whatsoever, without STAR's express permission is forbidden.
- The contents of this manual are subject to change without notice.
- All efforts have been made to ensure the accuracy of the contents of this manual at the time of going to press. However, should any errors be detected, STAR would greatly appreciate being informed of them.
- The above notwithstanding, STAR can assume no responsibility for any errors in this manual.

1. Getting Started With the Bluetooth Utility

Make the following preparations before using this utility.

1. Complete Bluetooth pairing between the computer and the Star POS device, and check the COM port access point.

See the "Bluetooth Pairing Manual - Windows-" for more information on pairing.


2. Executing the Bluetooth Utility

To execute the Bluetooth utility, proceed as follows.

1. Open the "Star_Bluetooth_Utility_V1.3.0.0" folder (Created when the "Star_Bluetooth_Utility_V1.3.0.0.zip" file is unzipped) and start "utility/Star_Bluetooth_Utility.exe".
2. When using Windows Vista, Windows 7, Windows 8 or Windows 8.1, User Account Control Dialog is displayed. Then, click "Yes".


3. Connecting to the Star POS device

1. Selecting the COM Port the Star POS device is connected. Then click the "Read" button.

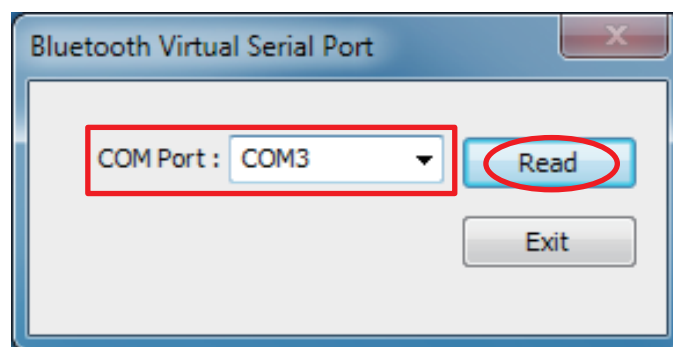

2. The Connected COM Port and the Bluetooth Device Address will be displayed to "Star Bluetooth Utility" window. Information of the connected the Star POS device is displayed.

4. Operating Instructions

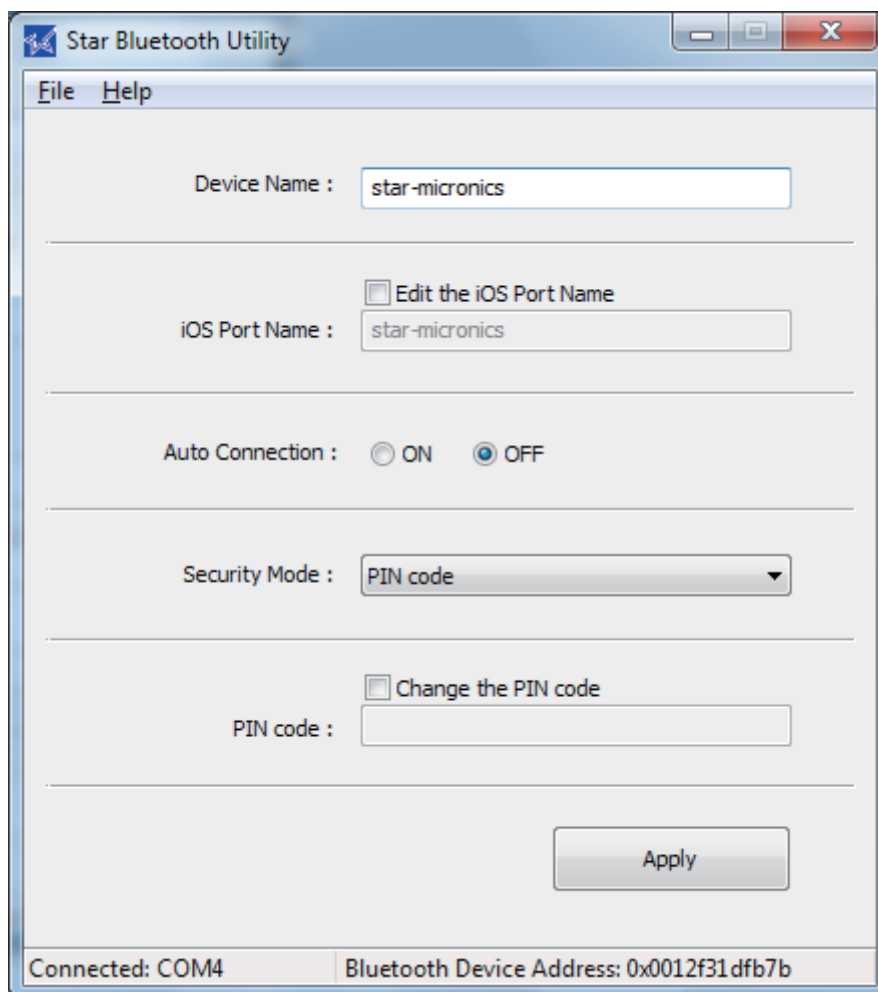

Please input and set up necessary items and click the [Apply] button.
If no item is changed, the [Apply] button will not be active.

- **Setting the Bluetooth Device Name**

Notes Regarding Setting a Bluetooth Device Name:

1. The Bluetooth Device Name can use a combination of letters, characters and symbols.
2. Supported characters are: "a" - "z", "A" - "Z", "0" - "9", and Various symbols.
3. A maximum of 16 characters can be used for the Bluetooth Device Name.

- **Setting the iOS Port Name**

iOS port name is used in the iOS environment.

When the Device Name is changed, the iOS Port Name is changed at the same time.

To assign the iOS Port Name that is different from the Bluetooth Device Name, follow these steps.

Notes Regarding Setting a iOS Port Name:

1. The iOS Port Name can use a combination of letters, characters and symbols.
2. Supported characters are: "a" - "z", "A" - "Z", "0" - "9", and Various symbols.
3. A maximum of 16 characters can be used for the iOS Port Name.

- **Setting the Auto Connection**

This function is only for iOS devices.

If you are not using iOS devices, please set this Auto Connection function "OFF".

- **Bluetooth Security Mode**

When using the Auto Connection Function in the iOS environment:

If the Auto Connection Function is turned ON, the Bluetooth security setting should be "SSP".

- **Setting the PIN Number**

Notes Regarding Setting a PIN Code :

1. Supported characters are: "a" - "z", "A" - "Z", "0" - "9".
2. A maximum of 16 digits can be used for the PIN Code..



URL: <http://www.star-m.jp/eng>